



Tornado Highbay


Features & Benefits

- Modern aluminum housing, Excellent finish.
- Economic design, Competitive Price.
- 60°, 90° and 120° beam angles available.
- Non dimmable, 0-10V dimmable option available.
- Suspension and ceiling surface mounted available.

Applications

LED high bay, low cost, excellent heat dissipation, easy installation for supermarkets, warehouse, factories, docks etc.

Tornado Highbay

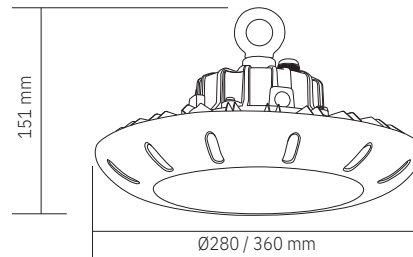

Specifications

CODE	WATTS	VOLTAGE	CRI	CCT	LUMENS @4000K	BEAM	IP RATING	DIM (MM)
CLS-TRDOHB-100W	100W	100-240V	Ra>70	3000K	13020 lm	60°	IP65	Ø280 X 151
				4000K	14000 lm			
				6000K	14000 lm			
CLS-TRDOHB-150W	150W	100-240V	Ra>70	3000K	19530 lm	60°	IP65	Ø320 X 151
				4000K	21000 lm			
				6000K	21000 lm			
CLS-TRDOHB-200W	200W	100-240V	Ra>70	3000K	26040 lm	60°	IP65	Ø360 X 151
				4000K	28000 lm			
				6000K	28000 lm			

BEAM ANGLE

